



Written on 16 January 2020



15 minutes of reading



News

Fundamental Research

Special issue **Recent PhD graduates**



The 2019 Yves Chauvin Prize was awarded to **Céline**

Pagis for her thesis conducted under the aegis of the Catalysis, Biocatalysis and Separation Division

and supervised by IRCELYON, which led to the **development of materials** suitable for a variety of applications in the energy and agrifood sectors.

This thesis is emblematic of a long-standing expertise of IFPEN (catalysis for oil refining), which now makes it possible to address themes such as the **biomass conversion** or **photocatalysis for CO₂ valorization**.

As is the case for all candidates for the Prize, this work is also the result of open science and excellence policy, initiated several years ago and supported by the Scientific Board, providing a launch ramp to prepare technological innovations for the energy transition: openness towards outside academic and industrial partners, excellence of IFPEN's researchers singled out for numerous awards.

I have been delighted to be part of this pivotal strategic approach aimed at ensuring IFPEN continues to play a leading role within the research and innovation community.

I hope you enjoy reading this issue.

Pierre-Henri Bigeard,
Former Executive Vice-President Research and Innovation of IFPEN



[See the PDF of the letter](#)

LES BRÈVES

THESIS OF CÉLINE PAGIS*, 2019 YVES CHAUVIN PRIZE




Zeolites, inorganic crystallized materials containing nanometric pores and

channels, are capable of trapping various chemical substances or catalyzing numerous reactions. These distinctive properties make them ideal materials for a large number of industrial processes. However, during chemical reactions, the nanometric size of the channels (< 2 nm) limits molecule diffusion, affecting reaction speeds and reducing the useful fraction of each crystal. To counter this phenomenon, generating additional porosity amounts to creating “highways”, thereby improving molecule flow.

This PhD thesis was conducted using **faujasite** zeolite (FAU) to explore synthesis routes leading to a new architecture, and more precisely to produce a **zeolite in which the crystals, named “nanoboxes”, have a single internal cavity**⁽¹⁾, with some major associated advantages:

- crystal size and structure maintained,
- nanometric dimensions of the wall making it possible to improve molecule diffusion within the crystal,
- creation of a favored molecule storage zone.

Two synthesis methods were developed (figure): the 1st consists in **agglomerating zeolite nanocrystals** to form hollow capsules, and the 2nd in **preferentially dissolving the center of each crystal**, thereby creating the internal cavity. Following the evaluation of the diffusional and catalytic properties of these new materials, a beneficial effect in terms of reduction in their characteristic diffusion length was demonstrated on their activity and their catalytic efficiency⁽²⁾.

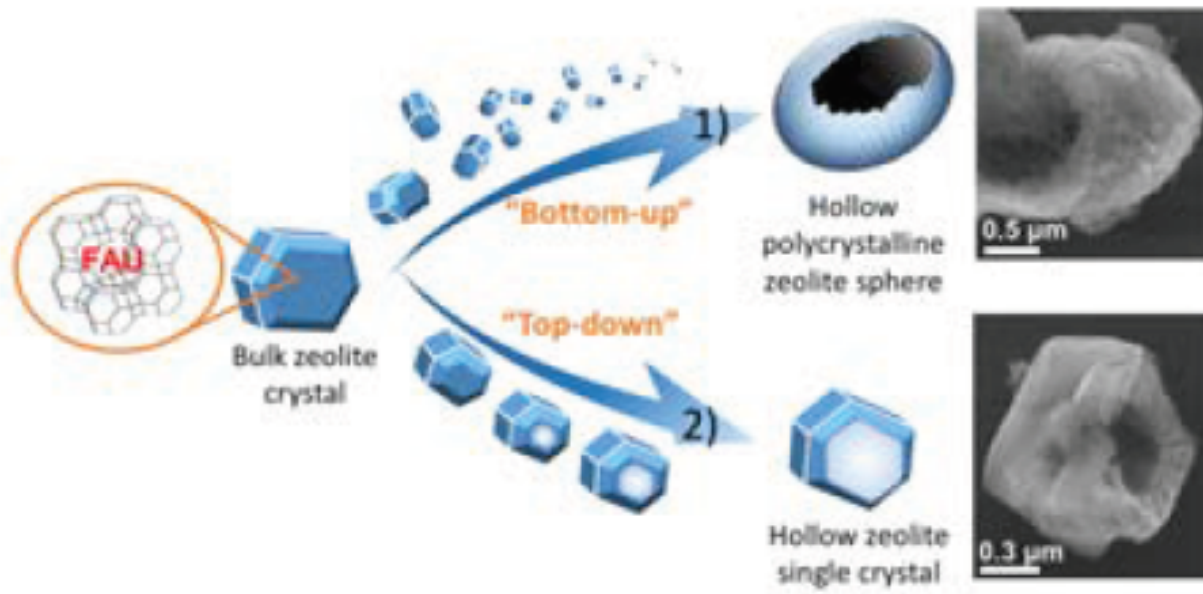

The two synthesis routes developed making it possible to obtain hollow FAU zeolite crystals.

This new approach paves the way for a greater understanding of the impact of structural zeolite parameters on molecule diffusion within them, with a view to improving this phenomenon.

*Thesis entitled **"Synthesis and catalytic evaluation of hollow zeolite Y crystals"**

(1) C. Pagis, A. R. Prates, D. Farrusseng, N. Bats, A. Tuel, *Chem. Mater.* 28 (2016) 5205-5223
DOI : [10.1021/acs.chemmater.6b02172](https://doi.org/10.1021/acs.chemmater.6b02172)

(2) C. Pagis, F. Meunier, Y. Schuurman, A. Tuel, M. Dodin, R. Martinez Franco, D. Farrusseng, *ChemCatChem* 10 (2018) 4525-4529
DOI : [10.1002/cctc.201801225](https://doi.org/10.1002/cctc.201801225)

Scientific contacts: [Céline Pagis - mathias.dodin@ifpen.fr](mailto:mathias.dodin@ifpen.fr) - raquel.martinez-franco@ifpen.fr

>> **ISSUE 39 OF SCIENCE@IFPEN**

Faujasite zeolite: a new generation is born

THESIS OF CLÉMENT TOUPOINT*

Ebullated bed chemical reactors are widely employed in the chemical engineering and petrochemical sectors. However, the hydrodynamics of ebullated bed reactors containing catalytic particles are poorly understood, often leading to units of this type being oversized.

It is quite natural given the complexity of the physical phenomena at play that the various problems should be subdivided into more targeted subjects. Accordingly, **this thesis was dedicated to the local hydrodynamic mechanisms of isolated cylindrical particles**, the first essential step prior to moving onto the study of the numerous interactions between particles in an industrial ebullated bed.

Initial research focused on the **anisotropy effects of an isolated cylindrical catalyst grain** on its free fall in a liquid (figure). The regimes observed were classified, on the basis of adimensional parameters such as density and elongation ratios and the Archimedes number^a. Three free fall path modes were thus identified.

Next, as part of an initial approximation of the confinement effects^b, the **free fall of cylindrical particles in 2D confined media** (Hele-Shaw cell^c) **was studied** with or without the presence of a swarm of ascending bubbles. High speed camera and advanced processing techniques made it possible to determine and analyze in detail the correlation between the changes in the paths of the free-falling particles and their interactions with ascending bubbles⁽¹⁾.



Extending the kinematic models resulting from this research to a larger number of particles will give rise to **predictive Euler-Euler models** that will be used to design future industrial installations. This research will be continued as part of a collaborative program^d.

a - Relationship between buoyancy and viscous effects.

b - Due to the large number of particles in a real ebullated bed.

c - Experimental apparatus composed of two glass plates placed very close together.

d - ANR MUSCATS project, with the Toulouse Institute of Fluid Mechanics and the Toulouse Chemical Engineering Laboratory.

*Thesis entitled **"Path and wake of cylinders falling in a liquid at rest or in a bubble swarm - towards the hydrodynamic modeling of ebullated bed reactors"**

(1) C. Toupoint, P. Ern, V. Roig, *Journal of Fluid Mechanics*, 2019, Vol. 866, pp. 82-111,
<https://doi.org/10.1017/jfm.2019.77>

Scientific contacts: lionel.gamet@ifpen.fr - rim.brahem@ifpen.fr

>> ISSUE 39 OF SCIENCE@IFPEN

Ebullated bed reactors: paths and wakes hit the headlines!


THESIS OF LUCA GEMELLO*

Bubble flows are widely used in the chemical and biotech industries, since they are an easy way to introduce gas reactants into a liquid medium. In all these industrial cases, knowing the bubble size is essential to the dimensioning of reactors since it is this that governs hydrodynamics and transfer of reactants.

Predicting the size and distribution of bubbles in reactors and fermenters is traditionally based on empirical correlations that, by nature, cannot be transposed from one geometry or system to another.

To overcome this, a **multi-physical and multi-scale modeling approach** was developed, incorporating physical bubble breakup and coalescence models into a population balance modeling. The combined use of **CFD^a** and a **QMOM^b method**, results in reduced calculation times⁽¹⁾, a major issue in the industrial context.

The complete model was validated on a variety of flow geometries and operating conditions⁽²⁾. It represents a major advance for the prediction of bubble size in large-capacity industrial reactors and fermenters.

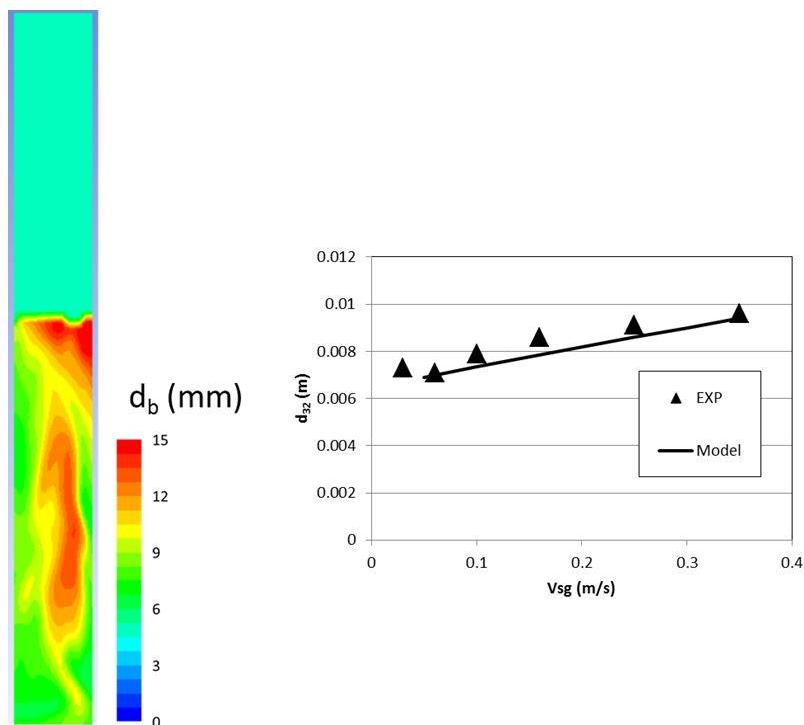

Prediction via the calculation of bubble diameters and comparison with experimental data (\varnothing 400 mm bubble columns, water-air system).

It is currently being extended to non-Newtonian rheology systems, such as fermentation broth, involved in biofuel production.

a - Computational Fluid Dynamics.

b - Quadrature Method Of Moments.

***Thesis entitled "Hydrodynamic modeling of bubble columns using an approach combining two-fluid models and a population assessment"**

(1) L. Gemello, V. Cappello, F. Augier, D. Marchisio, C. Plais, *Chemical Engineering Research and Design*, 2018, 136, 846-858.

<https://doi.org/10.1016/j.cherd.2018.06.026>

(2) L. Gemello, C. Plais, F. Augier, D. Marchisio, *Chemical Engineering Journal*, 372, 2019, 590-604.

<https://doi.org/10.1016/j.cej.2019.04.109>

Scientific contacts: cecile.plais@ifpen.fr - Frédéric Augier

>> ISSUE 39 OF SCIENCE@IFPEN


Bubble fineness: the secret of successful reactions

THESIS OF MARTIEN DUVALL DEFFO AYAGOU*

Hydrogen sulfide (H_2S) is a toxic gas found both in nature (green algae fermentation) and the industrial environment^a. On contact with water, it forms an acid **solution liable to cause steel corrosion via the oxidation of iron**, with the formation of a deposit that acts as a protective barrier to varying degrees and the generation of hydrogen gas on the metal surface. H_2S then facilitates the mass penetration of hydrogen into the steel, causing internal damage leading to fracture and, ultimately, structural failure.

Well documented in the oil sector, in which environments tend to be devoid of oxygen, this problem has not been studied in the biomass and geothermal sectors, with environments that can contain both H_2S and air. It was therefore important **to verify to what extent reactions between H_2S and O_2 affect steel corrosion and weakening by hydrogen**.

The research carried out highlighted the main products of the reaction between H_2S and O_2 dissolved in aqueous medium, sulfates and sulfites, resulting in acidification of this medium^{b(1)}. In addition, the iron sulfide deposit that forms on the surface of the steel is less dense and less protective in the presence of O_2 . These modifications lead to a considerable increase in the speed of corrosion (figure). In addition, the concentration of hydrogen in the steel is much greater in the presence of air^(2,3).

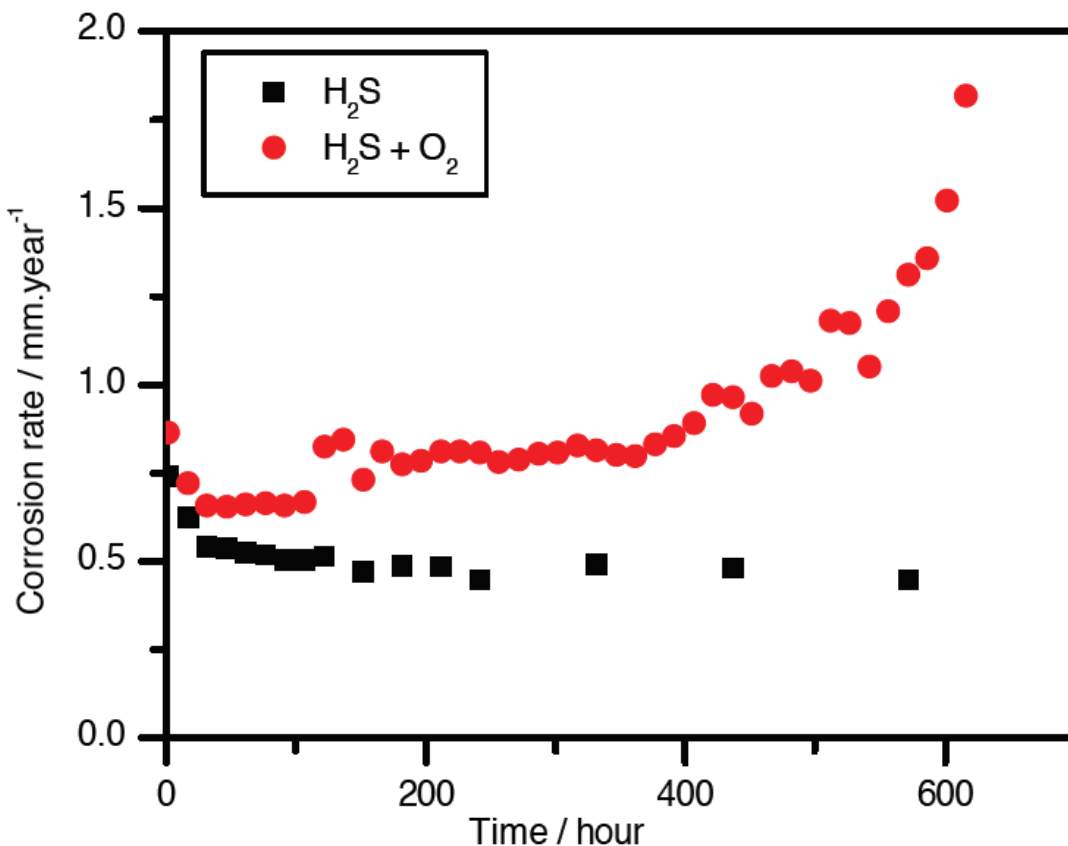

Variations in the speed of steel corrosion in aqueous media containing dissolved H₂S, in the absence or presence of oxygen.

These results suggest that **serious corrosion problems and increased weakening risks due to hydrogen are likely with the simultaneous presence of H₂S and O₂**. For the new energy sector, where just such an environment may exist, these risks will have to be taken into account when selecting metals.

a - In natural gas or biogas, for example.

b - Fall of close to one unit of pH per month in the presence of O₂.

*Thesis entitled "**Impact of oxygen and H₂S on the corrosion of pure iron and on hydrogen concentration**"

(1) L. Gemello, V. Cappello, F. Augier, D. Marchisio, C. Plais, *Chemical Engineering Research and Design*, 2018, 136, 846-858.

<https://doi.org/10.1016/j.cherd.2018.06.026>

(2) L. Gemello, C. Plais, F. Augier, D. Marchisio, *Chemical Engineering Journal*, 372, 2019, 590-604.

<https://doi.org/10.1016/j.cej.2019.04.109>

Scientific contact: **Jean KITTEL**

>> **ISSUE 39 OF SCIENCE@IFPEN**

An explosive cocktail for steel fracture?

THESIS OF FABIEN TAGLIANTE*


The distance between the fuel injector and the location where the flame stabilizes^a is a major factor affecting soot production in the chambers of compression ignition engines. This production is reduced or even eliminated when the distance in question is sufficiently large.

This distance is governed by the interactions between the turbulent flow, generated by the very high-pressure liquid fuel jet, and the reactions resulting from the ensuing chemical kinetics. In order to be understood, these complex interactions need to be studied on very small scales and under severe thermodynamic conditions.

This was done through the **combined use of optical diagnostics and numerical simulations**. For the experimental research, a high-pressure chamber was used, with **optical accesses to enable the evolution of the jet and its combustion** to be visualized over time using various simultaneous laser techniques⁽¹⁾.

3D simulations of gas jets similar to real two-phase liquid/gas flows were conducted, providing a highly detailed reproduction of local interactions⁽²⁾.

The resulting conceptual model (figure) provides a more accurate understanding of the interactions between the phenomena identified in previous research – the **counter-current propagation of premixed flames and auto-ignitions** (spontaneous or under the effect of hot gases) – and, for the first time, a **detailed understanding of their impact on diesel flame stabilization**.

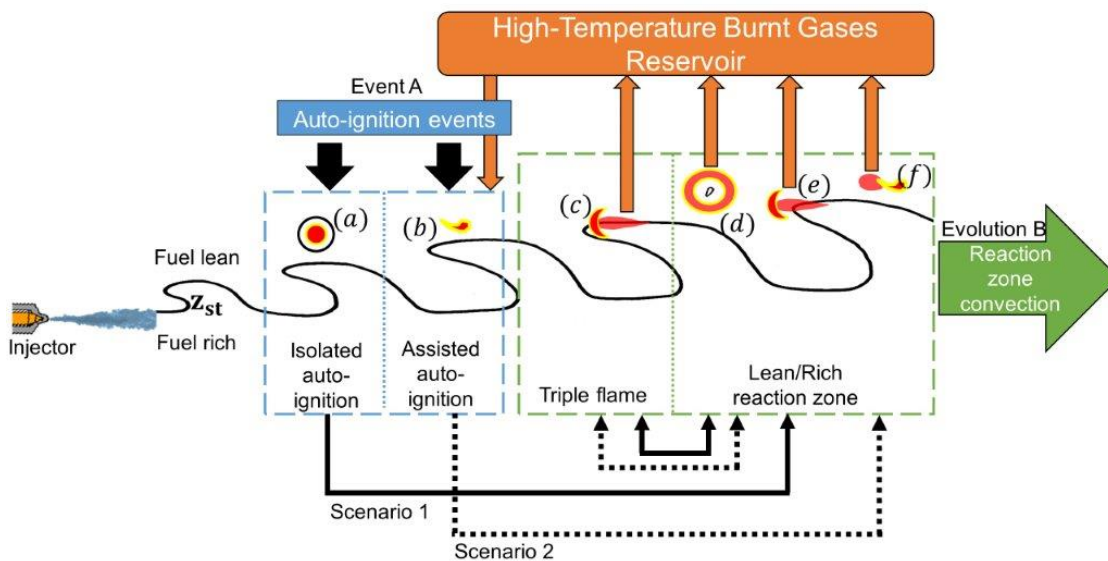

Conceptual model for diesel flame stabilization.

Simplified modeling approaches using new knowledge may lead to the development of technical solutions to significantly reduce soot produced in compression ignition engines.

^a - So-called lift-off distance.

*Thesis entitled "**Combined study by direct numerical simulation and optical diagnostics of the flame stabilization in a Diesel spray**"

(1) F. Tagliante, L. M. Malbec, G. Bruneaux, L. M. Pickett, C. Angelberger.

DOI : [10.1016/j.combustflame.2018.07.024](https://doi.org/10.1016/j.combustflame.2018.07.024)

(2) F. Tagliante, T. Poinso, L. M. Pickett, P. Pepiot, L. M. Malbec, G. Bruneaux, C. Angelberger.

DOI : [10.1016/j.combustflame.2018.12.007](https://doi.org/10.1016/j.combustflame.2018.12.007)

Scientific contacts: christian.angelberger@ifpen.fr - Gilles Bruneaux

>> **ISSUE 39 OF SCIENCE@IFPEN**

Lasers and algorithms to limit soot


THESIS OF ARIANE SUZZONI*

The interaction between surfactants and clay minerals is a well-known source of problems in the field of enhanced oil recovery^a since it can induce a modification in the injected formulations and a decrease in productivity due to pore plugging. This phenomenon also concerns the pollution remediation sector, in both land and water environments. The aim of the research conducted for this thesis was to gain a better understanding of the mechanisms at play.

Initially, the **interaction mechanisms were studied via tests involving the aqueous phase adsorption of anionic surfactants** on the surface of mineral clays (**kaolinite** and **illite**), which are simultaneously representative and very different from one another^{b (1)}. The influence of surfactant concentration on aqueous suspension stability was then studied via a combination of sedimentation monitoring over time, rheological measurements and small angle X-ray scattering (SAXS) experiments^c.

For kaolinite, these measurements revealed a dispersion of the particles in the presence of surfactants. Analysis of the microscopic structure of suspensions using **SAXS** reveals a strong correlation between surfactant concentration and the orientation of individual particles within sediments (figure), with consequences for petrophysical and confinement properties.

Such behavior was not observed with illite suspensions, in which there was little particle orientation within sediments. Beyond the observations made, combining the data acquired relating to these colloidal dispersions made it possible, for the first time, to link their macroscopic behavior to adsorption, wettability and particle orientation properties.

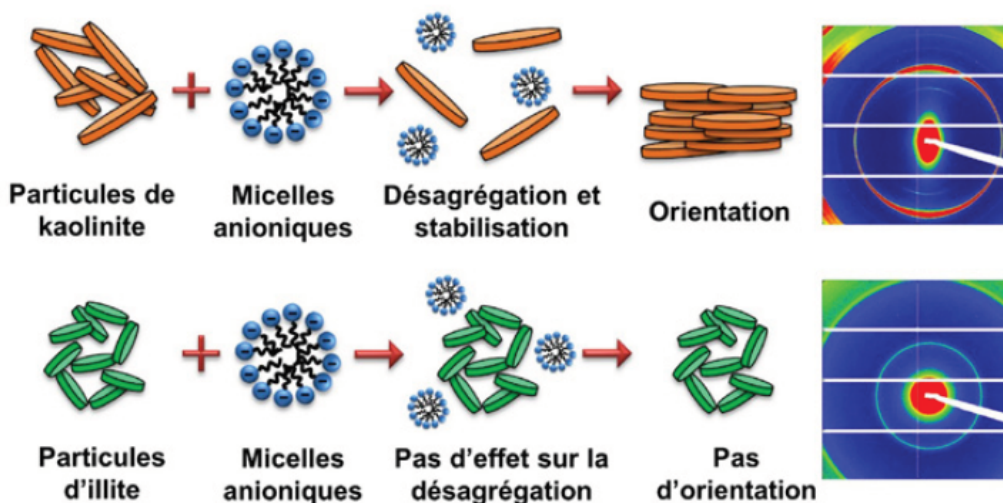

Effet de tensioactifs anioniques sur des particules argileuses.

This experimental work is therefore a first stage that has provided a raft of useful information for **effluent treatment**, **separation by flotation** and any other process involving flows in porous media.

a - Or EOR.

b - Particles of these clays differ in terms of their size, shape factors and the charges they carry.

c - Particularly at SOLEIL Synchrotron.

*Thesis entitled "**Evolution of the structure of clay minerals during their interactions with anionic surfactants**"

(1) A. Suzzoni, L. Barre, E. Kohler, P. Levitz, L. J. Michot, J. M'Hamdi, *Colloids and Surfaces A: Physicochemical and Engineering Aspects*, volume 556, Nov. 2018.

DOI : [10.1016/j.colsurfa.2018.07.049](https://doi.org/10.1016/j.colsurfa.2018.07.049)


Scientific contact: eric.kohler@ifpen.fr

>> **ISSUE 39 OF SCIENCE@IFPEN**

Interactions between clay minerals and anionic surfactants

THESIS OF MARISA DE SOUSA DUARTE

Entitled "*Measure, inside a reactor, of spatial and temporal profiles of liquid and solid phases by spectroscopic analyzes*"

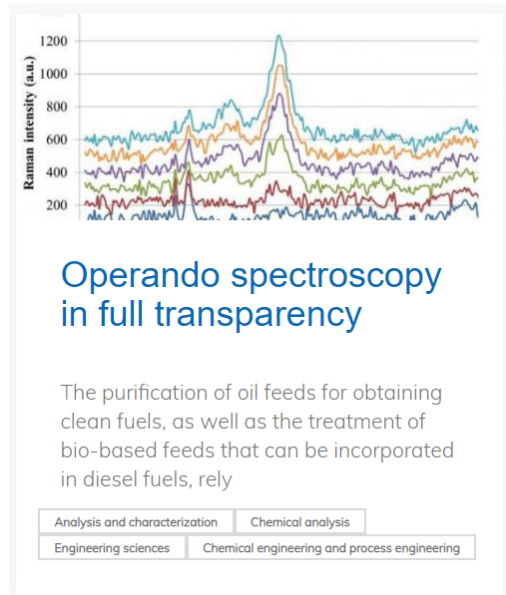

Article published in issue 36 of Science@ifpen, March 2019

Scientific contact: marisa.de-sousa-duarte@ifpen.fr

>> ISSUE 39 OF SCIENCE@IFPEN

Operando spectroscopy in full transparency

Special issue 39 of Science@ifpen - Recent PhD graduates
16 January 2020

Link to the web page :